
IMPORTANT:


Please read these instructions carefully before fitting the seat, refer to Care Instructions for maintenance and retain for future reference.
Please check the products for transport damage and that contents are complete before installation.
Consult a qualified plumber if you have any problems installing this product.
For any problems that may occur through incorrect installation cannot be accepted.

SPARTS SUPPLIED:




INSTALLATION STEPS:

1. Fit the Jointing Bolt into the Hinge Plate housing to complete the Hinge Set as shown in below.
   The Joining Bolt can be moved forward or backward to allow adjustment of the seat position.
   Prior to fixing the seat to the pan, ensure that the hinges are adjusted correctly and that the four Fixing Screws are firmly tightened as shown in below.

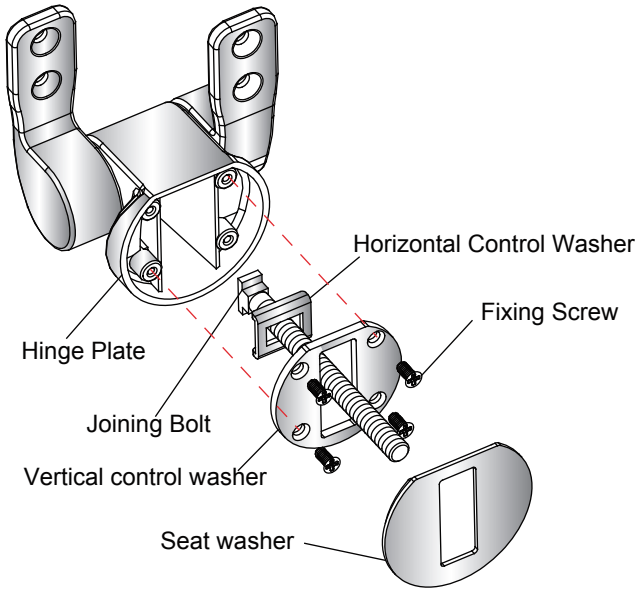


2. Fit the hinge and seat to pan using the Installation Method as shown in below.
   Place the Seat Washers onto the Hinge Plate, and insert the Joining Bolts through the toilet-pan fixing holes.
   Secure the Metal Flat Washer and Joining Nuts to the Joining Bolts, ensuring a secure final fit to the underside of the toilet-pan.

NOTE: Joining Nuts must be tight otherwise the seat may move, while after a few days use further tighten Metal Joining Nuts to allow for the compression of Seat Washers that would have occurred.

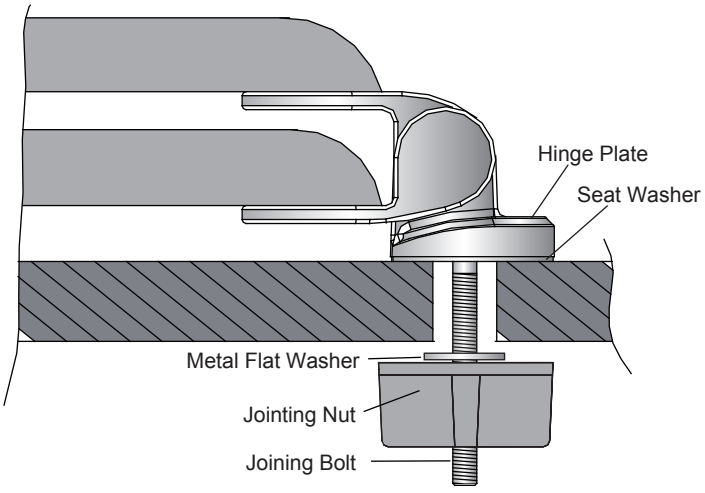


Need to make sure that the area is clean and free from grease.
Place the seat onto the fixings and adjust until the seat is located in a satisfactory position

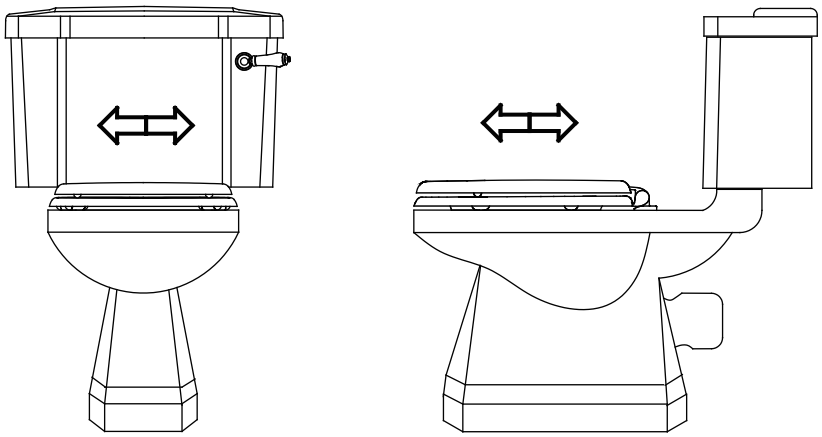

CARE INSTRUCTIONS


The toilet seat is made of Urea, matched with chrome plated hinge, and should be treated with care.

- Don't contact toilet seat with hard or sharp objects to avoid damages.
- Don't force the cover to close to avoid malfunction of the soft close mechanism or reduction of its lifetime.
- Don't use NaCO, NaOH or any other corrosive detergents to wipe the seat to avoid harm to the seat and your skin.
- Wipe it with clean dry soft cloth.
- IMPORTANT! Do not stand on the lid or ring of the toilet seat; this may cause damage to your toilet-pan or toilet seat.
- IMPORTANT! If you use bleaches and strong cleaners in the pan do not leave the seat closed whilst the cleaner acts on the pan – the fumes from bleaches & cleaners may destroy and/or discolour the finish on the seat.

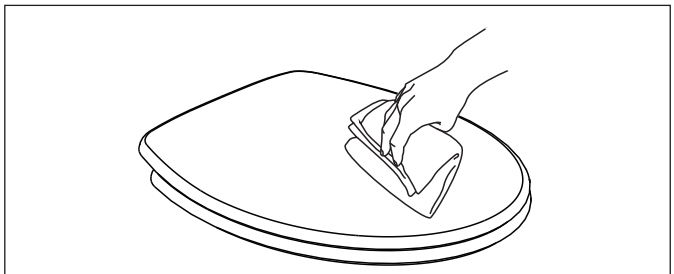

Regular maintenance

- Clean the seat and hinge plates with a mild detergent then dry with a soft cloth.

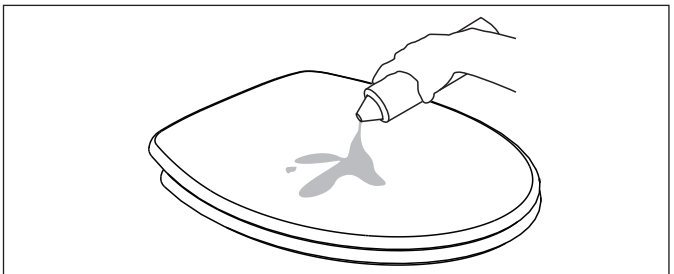


Detergent

- Don't clean the toilet seat with abrasive powder.
- Do not allow chemicals or cosmetics to come in contact with the seat.


Cautions




- Avoid direct sunlight as this can cause discolouration.



- Please do not put heavy things on the seat cover or suddenly sit forcefully on the seat,which may lead to the toilet seat crack.



- Do not clean the seat or hinge plates with strong chemical cleaners or abrasives.

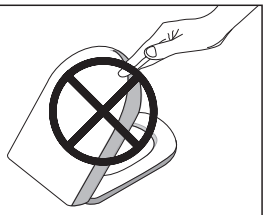

- Do not close the seat forcibly.