


SLOANE

Sloane Floorstanding Basin Unit

Burlington®

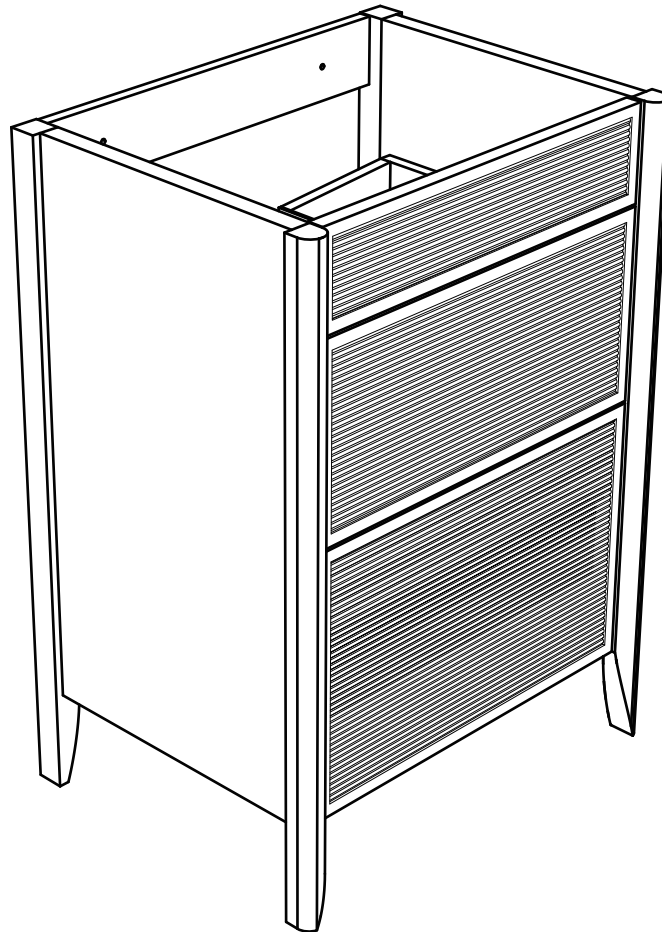

IMPORTANT INFORMATION BEFORE YOU START

Please read carefully and keep this information for further reference.

Thank you for buying a Burlington Product. To ensure that it works to its full potential, it needs to be fitted correctly.

Check the contents of the pack carefully before installation.

Burlington will not be held responsible for any de-fit/re-fit costs where faulty product has been fitted. If any fault is found with materials or workmanship, it must be reported immediately to the manufacturer. Remedial action will be taken, based on information received, on condition that:

1. Full details are supplied to the manufacturer.
2. The product has not been modified or tampered with;

3. The manufacturer is informed of any damage/shortages prior to installation.

4. The product has not been installed, or attempts have been made to install.

We do not accept responsibility for any problems that may occur through incorrect installation. This product should only be installed by a suitably qualified plumber/installer. Should the installation be completed by a non-qualified person any product guarantee may be considered invalid. For a claim made under our warranty, written certification of your installer's qualifications may be required.

BEFORE YOU START

IMPORTANT INFORMATION

Please read carefully and keep this information for further reference.




Please check for any hidden pipes or electrical cables before drilling holes in the floor or walls.

When using power tools always follow the manufacturer's user instructions. This installation guide details fitting to a solid wall. If your bathroom has studded/ plasterboard walls, please use appropriate fixings. Please ensure the wall can take the weight of the units detailed. Before installing a wooden bathroom unit into a new property, extension or recently plastered room we strongly advise the building/room is completely dry, well ventilated and adequately heated.

Tools Required (not supplied):

<u>Drill + 5 mm Drill Bit</u> <u>Drill + 10 mm Drill Bit</u>		<u>Pencil</u>	
<u>Tape Measure</u>		<u>Screw Driver</u>	
<u>Spirit Level</u>		<u>Safety Goggles</u>	
<u>Adjustable Spanner</u>		<u>Silicone Sealant</u>	

COMPATIBILITY

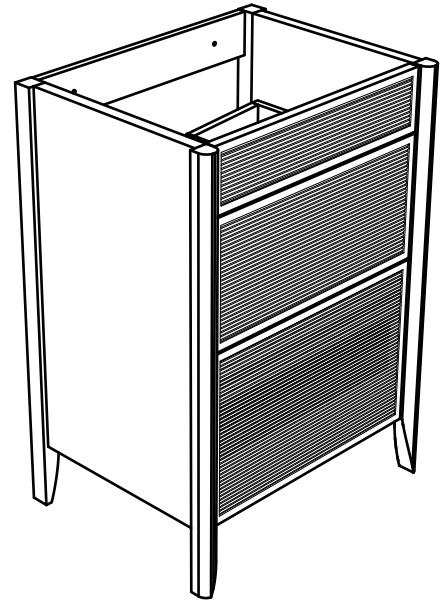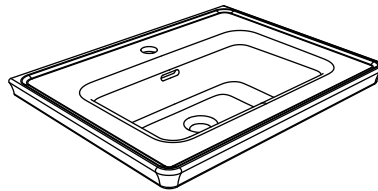

SNFHx 0.2kg

Handles and basins are supplied separately.
Drawer panel is not predrilled for handle.

SNFB600xxx 10.6kg

SNFB800xxx 14.5kg


SNFB1000xxx 18.3kg

SN600FSxxx 31.1kg


SN800FSxxx 36.3kg

SN1000FSxxx 41.6kg

FIXINGS




x2



x2


INSTALLATION

1

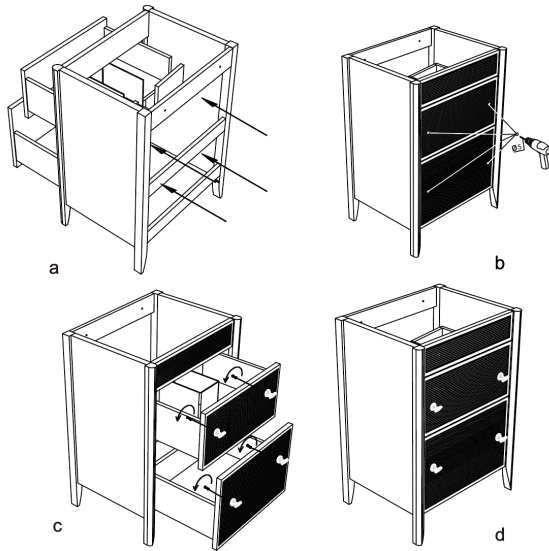


Mark and drill the handle holes at the appropriate positions on the drawer front panels, then fit the handles in place.

2

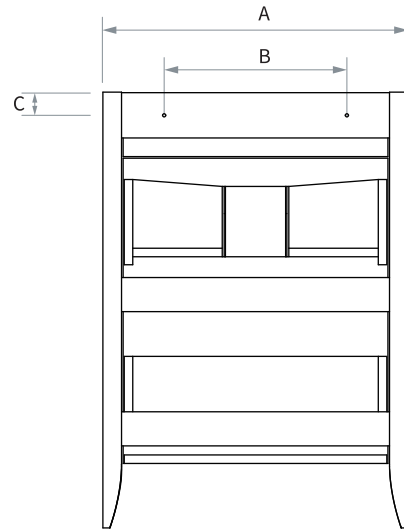


Measure the width and height of the fixing holes distances B and C. Mark the wall and prepare to drill.

3

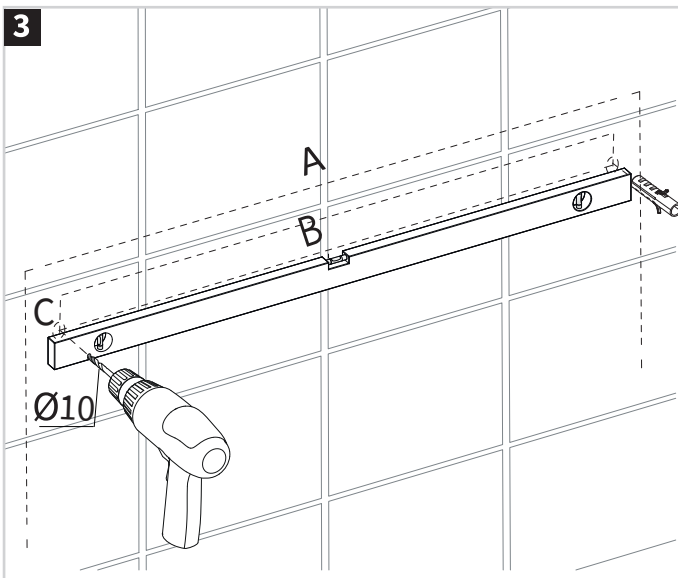

Drill the marks using an 10mm drill bit and ensuring there are no hidden pipes or cables in the wall. Make sure the correct drill bit is used for the surface being drilled and check that the holes are level.


4

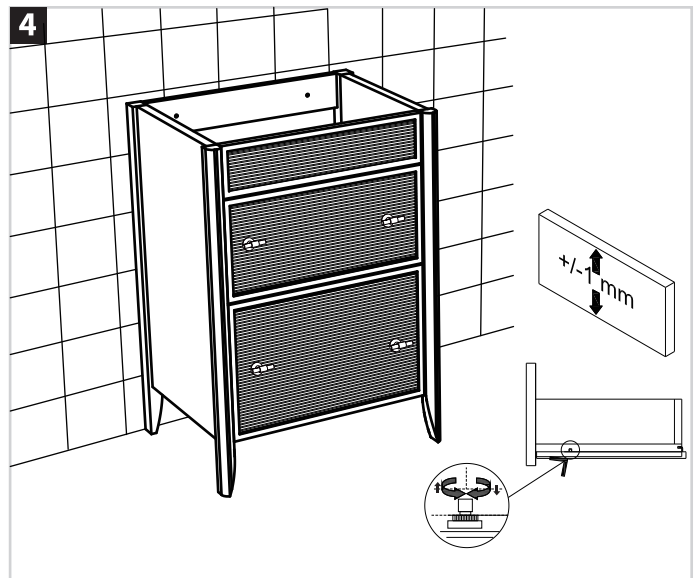

Put the unit in place and fix to the wall using the fixings provided.


To adjust the drawer back to the unit and rotate the left and right pulleys to adjust the gap between the drawers. Adjust counterclockwise upwards and clockwise downwards.

INSTALLATION

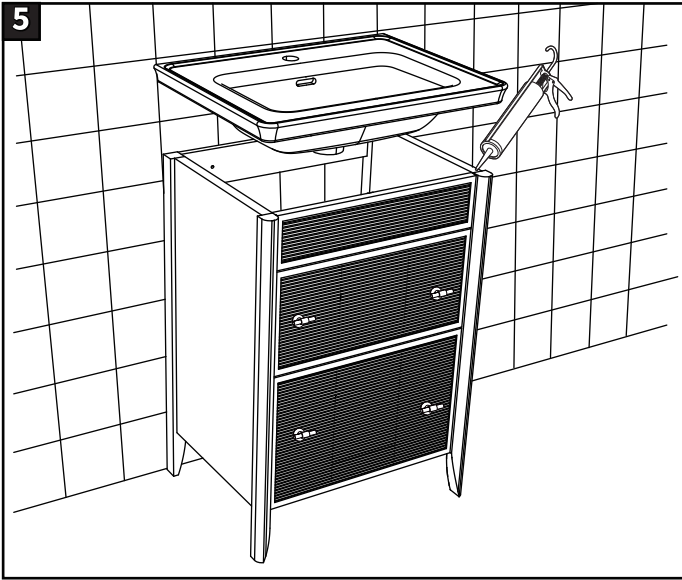

The basin or worktop, tap and waste fittings may now be installed, following the manufacturer's instructions. Connect water and waste pipework and turn on the water supply to check for any leaks.

Important: Apply silicone sealant on the top of the basin unit to keep watertight. Check the manufacturer's instructions for drying times.

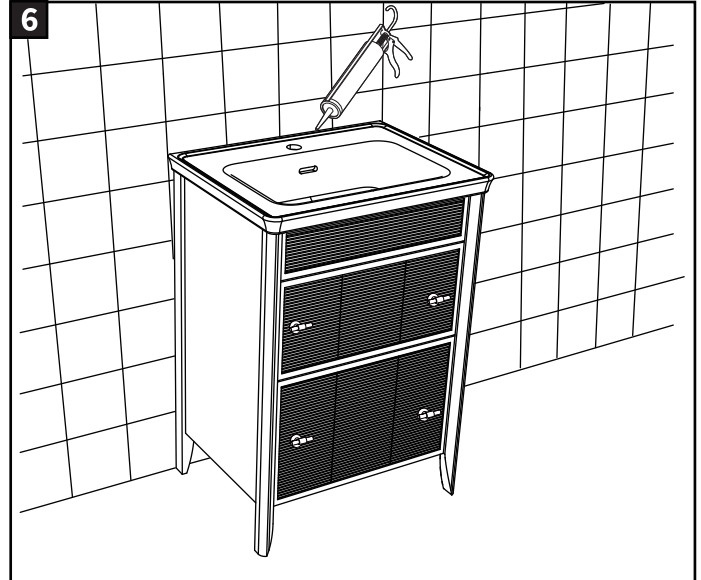

Apply silicone sealant at the back and top of the basin and unit to keep watertight. Check the manufacturer's instructions for drying times.

CARE & MAINTENANCE

Clean regularly using with warm soapy water and polish with only a soft cloth.

Any residues from soap, toiletries etc. should be rinsed off straight after use.

Household bleaches and cleaners containing harsh chemicals may damage the surface finish.

Avoid using abrasive cloths, scouring pads, scrub sponges, steel wool or anything similar.

Lime-scale marks can be cleaned using a diluted lime-scale remover used in accordance with manufacturers instructions.

Ceramic, glass and cast mineral marble basin products should be cleaned regularly with warm soapy water, then rinsed with clean water and, if desired, dried and polished with a soft cloth. Lime scale deposits can be removed using a 50:50 solution of warm water and lime scale remover and soft clean cloth.

We recommend regular cleaning with Cream Polish SD150RW, specially formulated to clean and help protect the surface of glass and cast mineral marble basins. Please also take care not to damage the lacquered surface on the underside of the glass washbasin that gives the washbasin its colour. Damage to the underside of the washbasin may be visible through the glass.

Take care how you handle the washbasin prior to installation and place it on a soft surface to avoid damage. Regularly clean worktop, carcass and drawer using a micro-fibre cloth. Do not use abrasive cleaners or bleach as this will permanently damage the lacquered surfaces. If any maintenance is required then it must be carried out by a qualified Plumber.