
GOLD AND NICKEL

Lighting Range

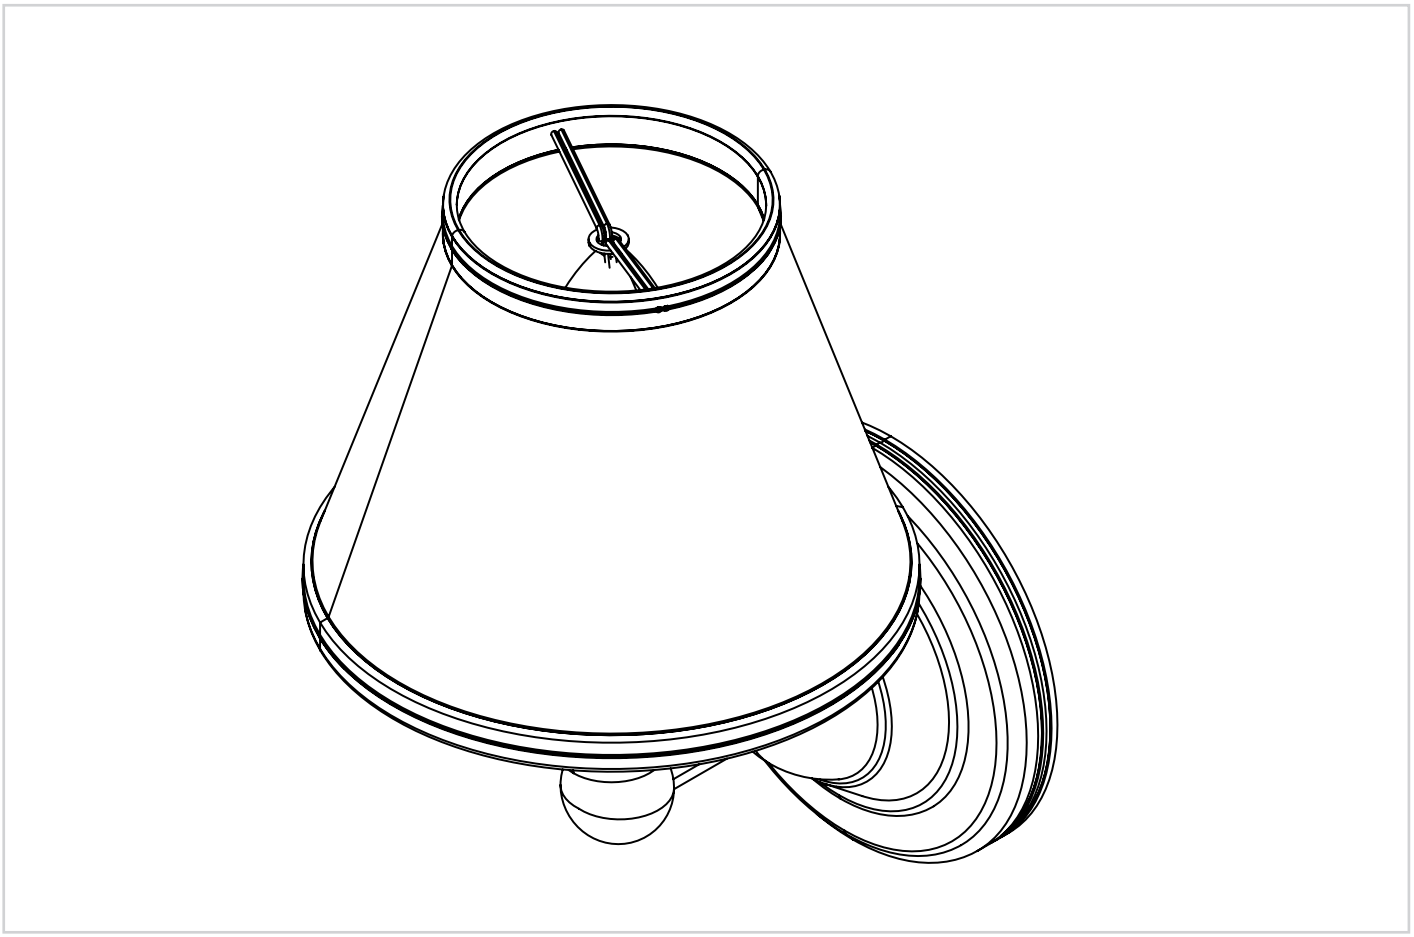

PRODUCT CODES:

EL_BL12

IMPORTANT INFORMATION BEFORE YOU START

Please read carefully and keep this information for further reference.

Thank you for buying a Burlington Product. To ensure that it works to its full potential, it needs to be fitted correctly.

Check the contents of the pack carefully before installation.

Burlington will not be held responsible for any consequential costs where faulty product has been fitted. If any fault is found with materials or workmanship, it must be reported immediately to the manufacturer. Remedial action will be taken, based on information received, on condition that:

1. Full details are supplied to the manufacturer.
2. The product has not been modified or tampered with;
3. The manufacturer is informed of any damage/shortages prior to installation.
4. The product has not been installed, or attempts have been made to install.


We do not accept responsibility for any problems that may occur through incorrect installation. This product should only be installed by a suitably qualified electrician/installer. Should the installation be completed by a non-qualified person any product guarantee maybe considered invalid. For a claim made under our warranty, written certification of your installer's qualifications may be required.

SAFETY ADVICE

Please use the supplied wall fixing bracket and follow the correct installation method. If the instructions are not followed appropriately there is an increased safety risk to the user. It is important to install light fittings in the correct bathroom zone i.e. the zone referred to in the IP rating of the element.

All installations must comply with guidelines which are based on a zonal concept. The diagram below illustrates this concept and must be followed to ensure the safe installation of electrical appliances in the bathroom. These regulations apply to domestic installations only.

It is recommended that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician in accordance with current IEE regulations. Failure to have electrical products installed and certificated by a qualified electrical engineer will invalidate any product guarantee. For full details reference should be made to the latest copy of the IET wiring regulations and all applicable British Standard and European norm specifications.

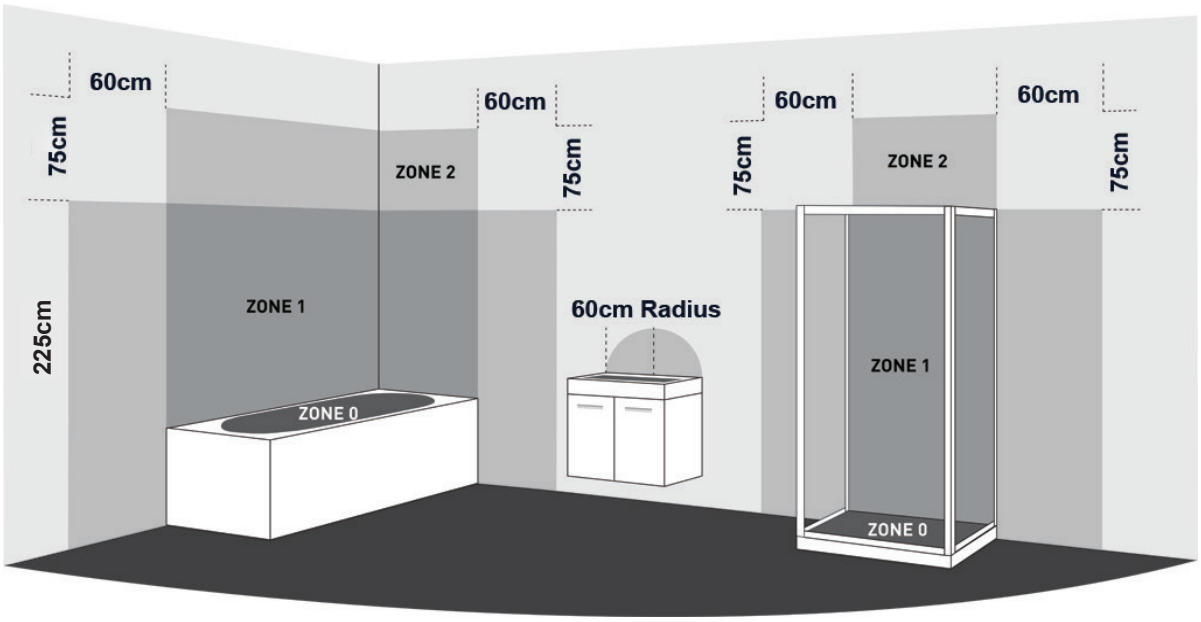

This product is IP44 rated and is suitable for installation within zone 2 above, and complies with the following safety standards: EN 60598.

All lights can be operated via the mains light switch for the room or an independent light switch.



EL_BL_12


Compatible Bulbs -

E27 (A60 recommended)

Dimmability -

Yes

WIRING DIAGRAM

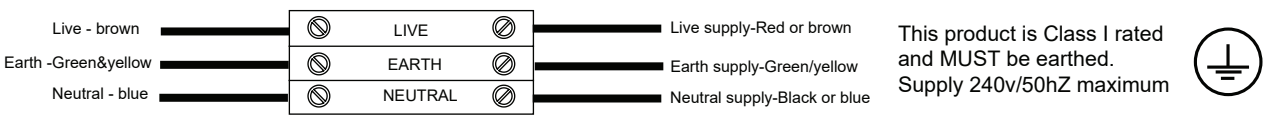

BEFORE YOU START

Important Pre-Installation Notes


Please check for any hidden pipes or electrical cables before drilling holes in the floor or walls. When using power tools always follow the manufacturer's user instructions. This installation guide details fitting to a solid wall. If your bathroom has studded/ plasterboard walls, please use appropriate fixings.

Make sure that the wall and ceiling can take the weight of the products before undertaking the installation.
It is recommended that the lighting fixtures are installed after tiling, ensuring that the product is installed flat to the tile face and allows product to be easily removed if required in the future.
This document has been prepared for your guidance, you must exercise due care at all times.

Ensure the domestic electrical mains supply to which the ceiling light is being connected is turned off.

Before starting the electrical work or connecting your light you will need to switch off your power supply at the fuse box (consumer unit). Either the miniature circuit breaker (MCB) can be turned off for the circuit for your light (it is suggested to apply RED insulating tape over the MCB to prevent it from being accidentally turned on). Or the main switch can be turned off, the circuit fuse removed, and the main switch turned on again to restore power to the rest of the house.

CLASS I Luminaires (Earthed) - Connect the brown wire from the luminaire to the supply live wire (red or brown). Connect the blue wire to the supply neutral wire (black or blue). Connect the green/yellow wire to the supply earth wire (green/yellow) or connect the supply earth to the luminaire earth terminal marked: ⏚



CLASS II Luminaires (Not earthed) - These luminaires are double insulated and have the symbol: ⧈

These fittings do not have to be connected to the supply earth. Make sure that the basic insulation of the supply wiring cannot contact touchable metal. Connect the brown wire from the luminaire to the supply live wire (red or brown). Connect the blue wire to the supply neutral wire (black or blue). Isolate the supply earth wire.


If silicone sleeving is provided, fit over the supply cable up to the terminal block or lamp holder, to at least the mounting surface, to protect cable from heat.





Tools Required (not supplied):


Drill + 4mm Drill Bit		Pencil	
Tape Measure		Screw Driver	
Spirit Level		Safety Goggles	


INSTALLATION

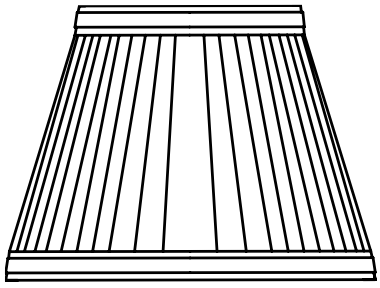


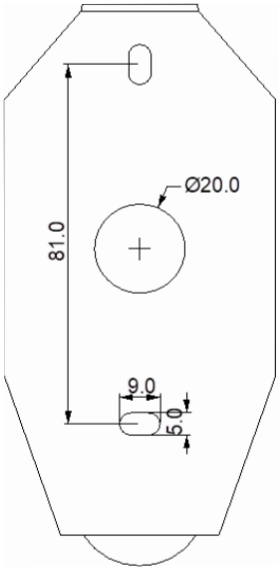


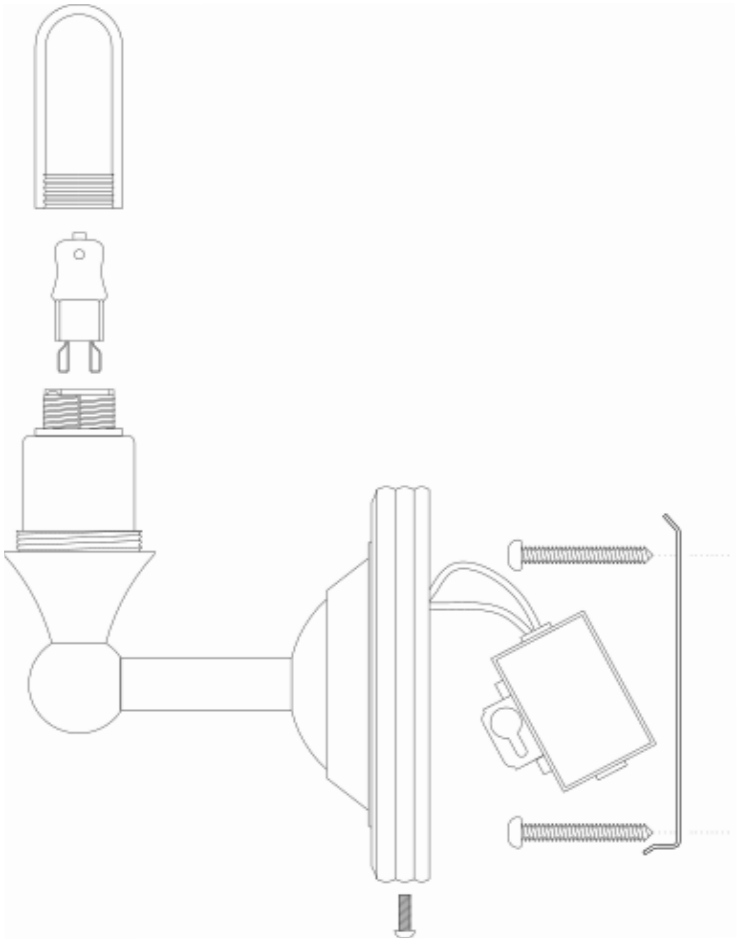

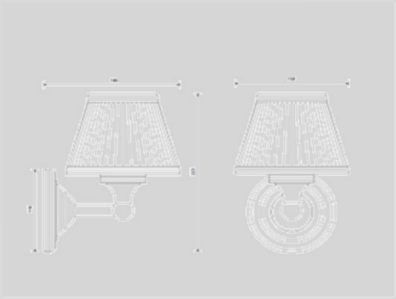




X1


X1


X1


X1


X1


X2


X2


X1

CARE & MAINTENANCE

The material we use in our lighting is very durable, nevertheless care should be taken when cleaning them. Excess dirt and material can be removed with a damp cloth, and then rubbed down gently with a dry cloth. All finishes are vulnerable to acid attack and some strong substances such as household cleaners, disinfectants, denture cleaners, hair dyes, wine making, and photographic chemicals can cause the surface to go black or peel.

Note: Never use abrasive detergents or disinfectants or those containing alcohol, hydrochloric acid or phosphoric acid.

WEEE compliance - This product must not be mixed with general household waste. Dispose of each fitting according to local authority guidance.

Lake View House
Rennie Drive, Dartford
Kent DA1 5FU
United Kingdom
0345 873 8840
Burlingonbathrooms.com

Part of the
Bathroom Brands Group

We reserve the right to make technical modifications without prior notice.